



## CLEARANCES

### PARALLEL POSITIONING

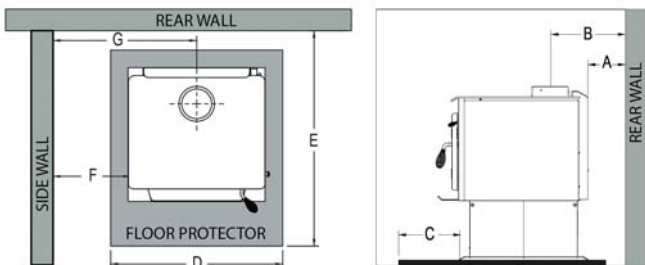

DESCRIPTION	Default Flue Kit		Default Flue Kit with Flue Shield (WS22 ONLY)
	WS18	WS22	
A Min. clearance from back of unit to rear wall	175	300	100
B Min. clearance from centre of spigot to rear wall	345	468	268
C Min. distance from front of base to floor protector front	300	300	300
D Min. floor protector front width	800	800	800
E Min. distance from rear wall to front of floor protector	1055	1291	1091
F Min. distance from unit side to side wall	300	400	400
G Min. clearance from centre of spigot to side wall	618	730	730

### CORNER POSITIONING (45°)

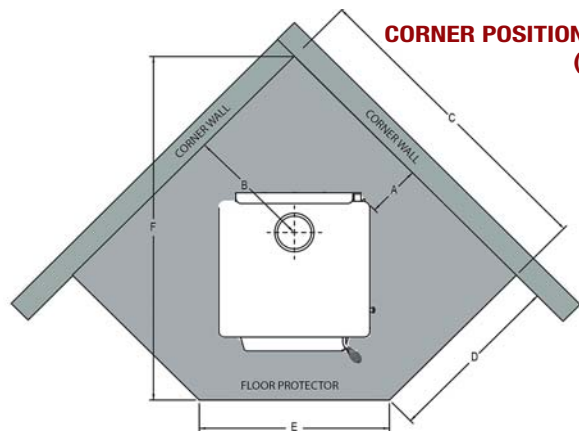

DESCRIPTION	Default Flue Kit	
	WS18	WS22 with Flue Shield
A Min. clearance from firebox corner to walls	155	75
B Min. distance from centre of spigot to corner walls	470	393
C Min. distance from corner wall to floor protector front	1219	1217
D Min. floor protector projection from corner wall	730	731
E Min. floor protector front width	692	688
F Min. overall floor protector depth	1379	1377

## HEATILATOR OFFERS YOU CLEAN, EFFICIENT WOOD FIRES WITH OUTSTANDING FEATURES:

Environmentally Friendly Operation contributing to a 'Greener Earth'

Australia's most efficient fireplace (WS18)

Australia's most efficient and cleanest burning insert fireplace (WINS18)

Wide opening door with single lever operation

An air wash system to keep the glass clean

Both Primary and Secondary Combustion Technology for cleaner burns and less maintenance

### 15 YEAR WARRANTY

Most comprehensive on the market

### NO CATALYTIC CONVERTER

**AS/NZS COMPLIANT 2015 & 2019  
ULTRA LOW EMISSIONS**

Contact us at:

Jetmaster/Heat & Glo  
444 Swan Street, Richmond 3121

Phone:

**1300 219 875**

Web:

**heatilator.com.au**




heatilator  
**ECOCHOICE™**

wood stoves & insert



### Learn more

Scan the QR Code to the left with your phone's QR Code reader to learn more about Heatilator.

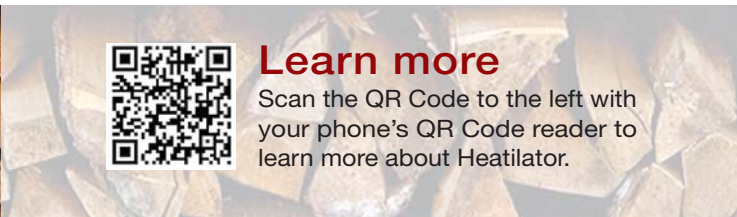



## WS18-AU

### Wood Stove

- Heats up to 21 building squares
- Up to 8 hours burn time
- Average efficiency 85%
- 1.3g/kg emissions

#### WS18 Specifications

Width	635mm
Height	736mm
Depth	673mm
Weight	145kgs
Max. Burn Time	Up to 8 hrs
Firebox Capacity	2.0 cu. ft.
Max Log Length	457mm
Emissions	1.3 grams/kg



## WS22-AU

### Wood Stove

- Heats up to 30 building squares
- Up to 12 hours burn time
- Average efficiency 82%
- 1.2g/kg emissions

#### WS22 Specifications

Width	660 mm
Height	863mm
Depth	781 mm
Weight	185kgs
Max. Burn Time	Up to 12 hrs
Firebox Capacity	2.7 cu. ft.
Max Log Length	588mm
Emissions	1.2 grams/kgs



## WINS18-AU

### Wood Insert

- Heats up to 21 build sqs
- Up to 8 hours burn time
- Average efficiency 77%
- 1.1g/kg emissions



#### WINS18 Specifications

Min. Fireplace Opening - Front Width	622 mm
Min. Fireplace Opening - Back Width	622 mm
Min. Fireplace Opening - Height	546 mm
Min. Fireplace Opening - Depth	406mm
Weight	153kgs
Max. Burn Time	Up to 8 hrs
Firebox Capacity	2.0 cu. ft.
Max Log Length	457mm
Emissions	1.0 grams/kgs

#### WINS18 Floor Protector\*

Minimum size	900D x 800W x 75mm Thick
Extends from front face of Firebox	300mm