


JETMASTER FREE STANDING METAL CASING

Typical installation with exposed "flue" and or one length heat shield, refer to deco mesh diagram for firebox and flue clearances to combustibles.

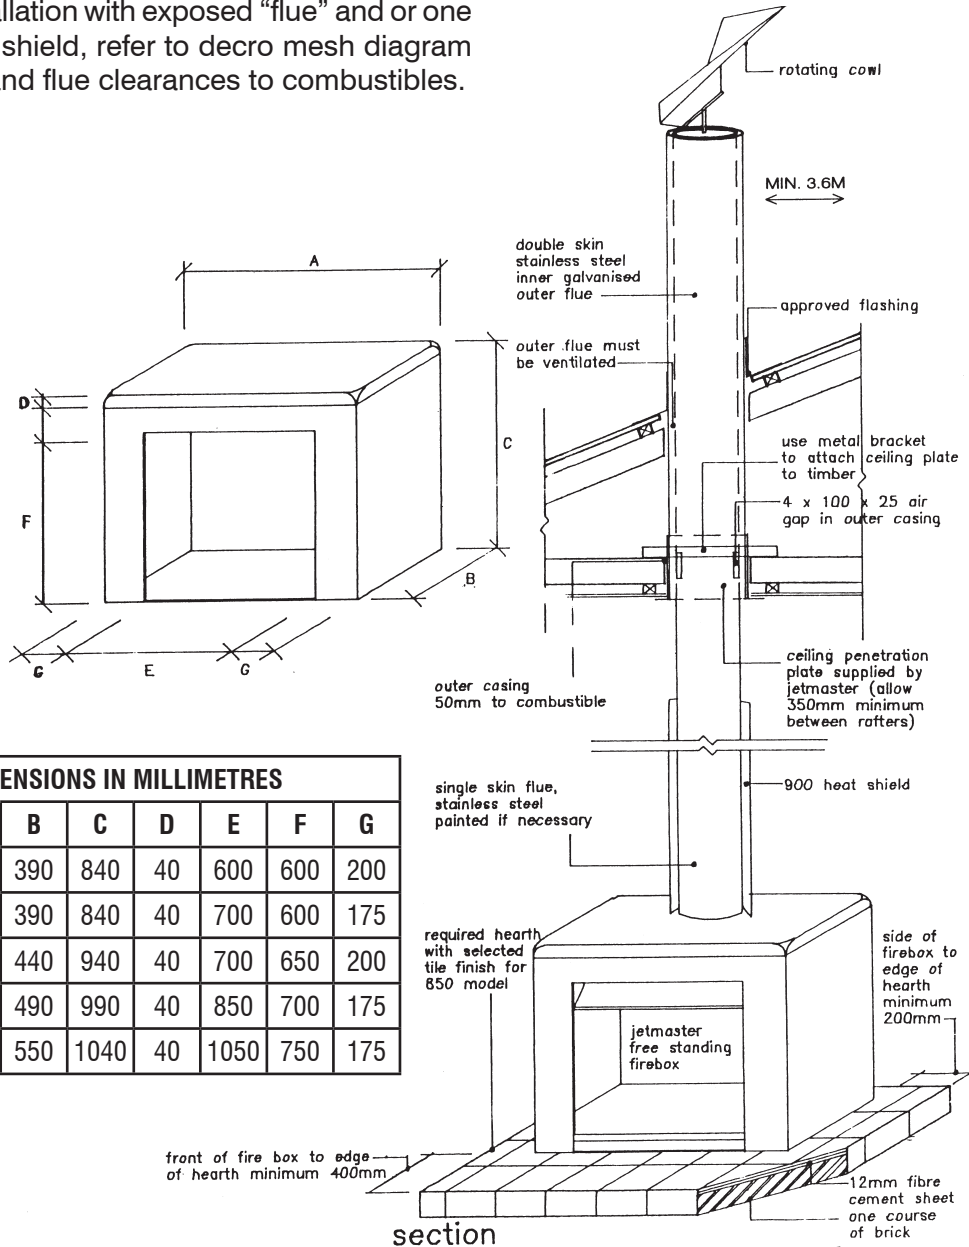

DIMENSIONS IN MILLIMETRES							
MODEL	A	B	C	D	E	F	G
600	1000	390	840	40	600	600	200
700S	1050	390	840	40	700	600	175
700D	1100	440	940	40	700	650	200
850	1200	490	990	40	850	700	175
1050	1400	550	1040	40	1050	750	175

Hearth Thickness
 Models 400 to 850 26mm
 Model 1050 100mm
 * Hearth extends 100mm behind firebox

SPECIFICATION SHEET 16


Specifications subject to change, contact Jetmaster prior to commencement.

JETMASTER FREE STANDING METAL CASING

Typical installation with deco mesh heat shield to ceiling.

FIREBOX AND FLUE CLEARANCES TO COMBUSTIBLES			
Jetmaster 600, 700S, 700D & 850 Freestanding			
	A	B	C
Flue Pipe	250	175	50
Flue Pipe with 900 Heat Shield	100	175	50
Flue Pipe with Decro Mesh	100	175	50

NOTE: min. 400mm from front of firebox to edge of hearth

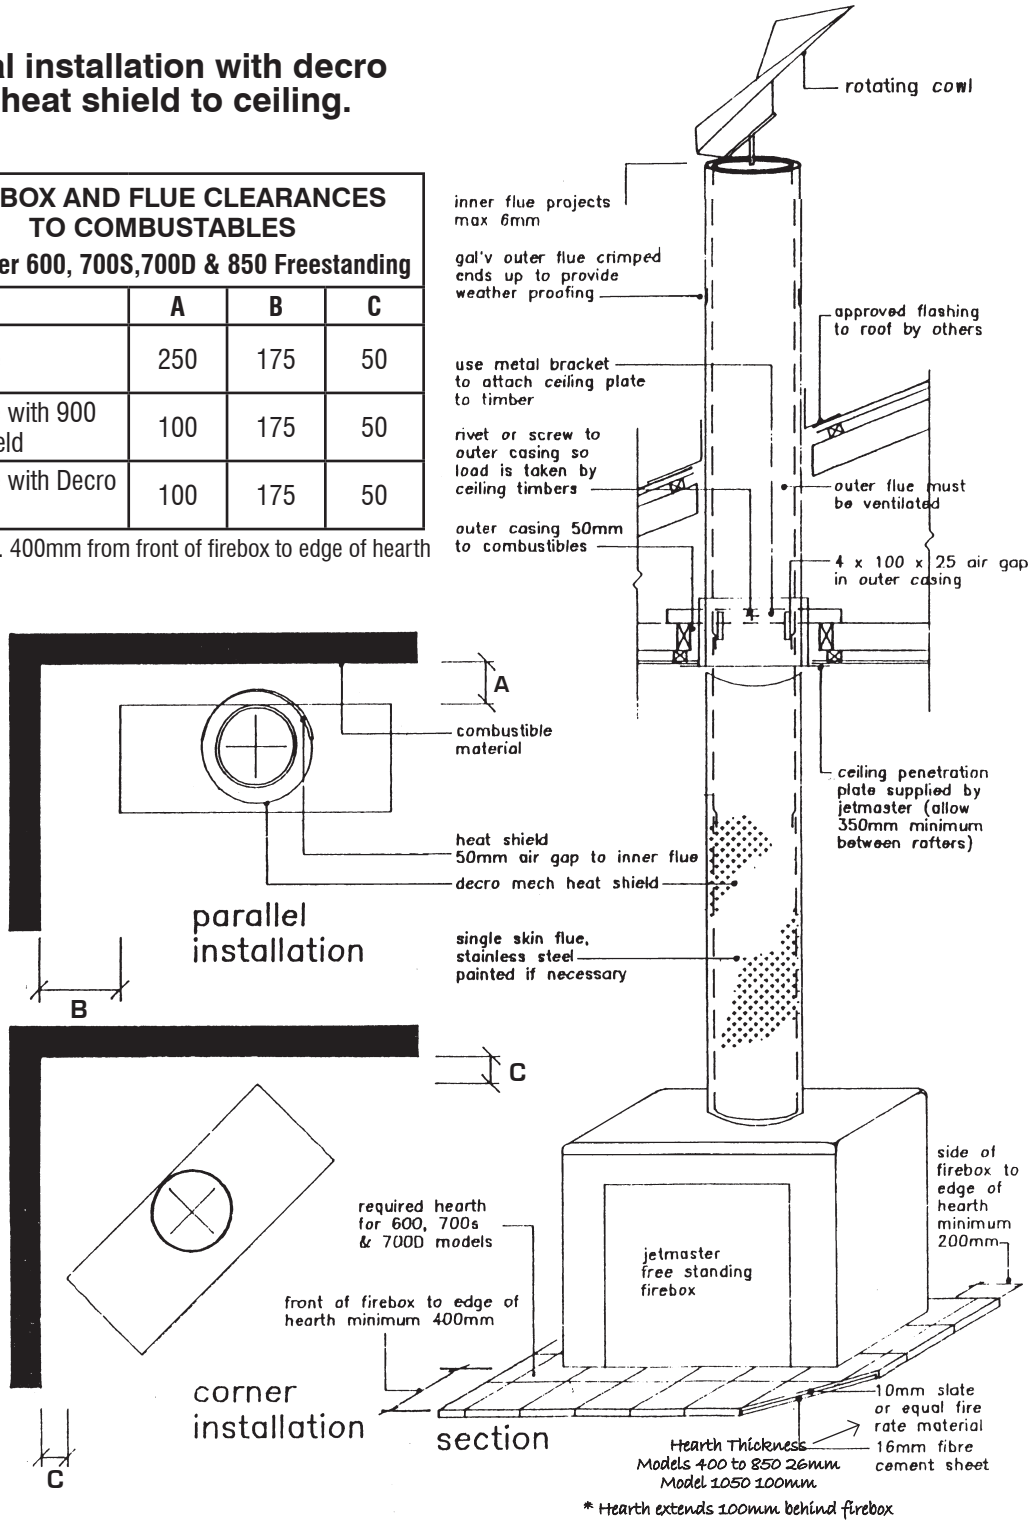

SPECIFICATION SHEET 17